


MSE430P

无限涂层 4刃尖角平底铣刀
MUGEN-COATING 4-Flute Sharp Edge End Mill



- 尖角型，可广泛应用于从有色金属到钢材的不同材质。
- 可实现歪斜少的精加工。
- It can be cut from nonferrous to steels due to the sharp edges.
- Minimize tool deflection for accurate finishing.

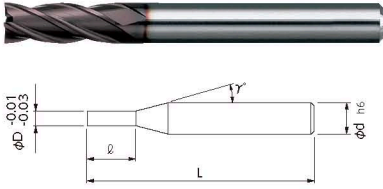

加工材料 Work Material

碳素钢 Carbon Steels	合金钢·工具钢 Alloy Steels· Tool Steels	预硬钢·调质钢 Prehardened Steels	淬火钢 Hardened Steels	
			~55HRC	55HRC~
◎	◎	◎	◎	
◎	◎	◎	◎	◎
◎	◎	◎	◎	◎

单位 [规格: mm / 价格: 日元]
Unit [size: mm / Retail Price: JPY]

产品代码 Code No.	(D)刃径 Dia.	(L)刃长 Length of Cut	(γ)颈角 Neck Taper Angle	(d)柄径 Shank Dia.	(L)全长 Overall Length	定价(日元) Retail Price
08-00112-00100	1	2.5	9°	4	45	5,200
08-00112-00150	1.5	4	9°	4	45	5,200
08-00112-00200	2	5	9°	4	45	3,700
08-00112-00250	2.5	7	9°	4	45	3,700
08-00112-00300	3	8	9°	4	50	4,200
08-00112-00400	4	10	-	4	50	4,300
08-00112-00500	5	13	9°	6	55	4,500
08-00112-00600	6	15	-	6	55	4,700
08-00112-00800	8	20	-	8	65	7,300
08-00112-01000	10	25	-	10	75	9,700
08-00112-01200	12	30	-	12	80	13,700

订购方法

请指定MSE430P 刃径(D)。
When you order, indicate MSE430P (D).

※ (γ)为参考值。


※ (γ) is reference value.

● 切削参数表记载于第D-042页

● Recommended Milling Conditions are shown on page D-042.

MSE430

无限涂层 4刃平底铣刀
MUGEN-COATING 4-Flute End Mill

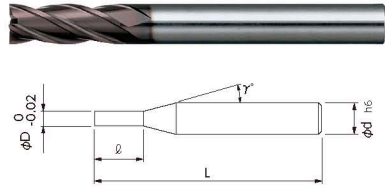

- 4刃平底铣刀采用NS独创的无限涂层。
- 可广泛应用于从生材到高硬度材料的切削。
- Our original MUGEN-COATING has been put on 4-flute end mill.
- It can be cut from non-hardened materials to hardened materials.



加工材料 Work Material

碳素钢 Carbon Steels	合金钢·工具钢 Alloy Steels· Tool Steels	预硬钢·调质钢 Prehardened Steels	淬火钢 Hardened Steels	
			~55HRC	55HRC~
◎	◎	◎	◎	
◎	◎	◎	◎	◎
◎	◎	◎	◎	◎

单位 [规格: mm / 价格: 日元]
Unit [size: mm / Retail Price: JPY]

产品代码 Code No.	(D)刃径 Dia.	(L)刃长 Length of Cut	(γ)颈角 Neck Taper Angle	(d)柄径 Shank Dia.	(L)全长 Overall Length	定价(日元) Retail Price
08-00110-00100	1	2.5	9°	4	45	4,900
08-00110-00150	1.5	4	9°	4	45	4,900
08-00110-00200	2	5	9°	4	45	3,000
08-00110-00250	2.5	7	9°	4	45	3,000
08-00110-00300	3	8	9°	6	50	3,100
08-00110-00350	3.5	9	9°	6	50	6,500
08-00110-00400	4	10	9°	6	50	3,500
08-00110-00450	4.5	12	9°	6	55	7,000
08-00110-00500	5	13	9°	6	55	3,600
08-00110-00550	5.5	14	9°	6	55	7,500
08-00110-00600	6	15	-	6	55	3,800
08-00110-00650	6.5	17	9°	8	60	11,600
08-00110-00700	7	18	9°	8	65	9,700
08-00110-00750	7.5	19	9°	8	65	12,200
08-00110-00800	8	20	-	8	65	7,000
08-00110-00850	8.5	22	9°	10	70	15,200
08-00110-00900	9	23	9°	10	70	15,200
08-00110-00950	9.5	24	9°	10	75	17,600
08-00110-01000	10	25	-	10	75	9,300
08-00110-01200	12	30	-	12	80	12,800
08-00110-01400	14	35	-	12	100	38,400
08-00110-01500	15	40	9°	16	110	46,000
08-00110-01600	16	40	-	16	110	46,000
08-00110-01800	18	45	-	16	120	63,900
08-00110-02000	20	50	-	20	135	71,600

订购方法

请指定MSE430 刃径(D)。
When you order, indicate MSE430 (D).

※ (γ)为参考值。

※ (γ) is reference value.

● 切削参数表记载于第D-042页

● Recommended Milling Conditions are shown on page D-042.