

RSE230

规格
Size $\phi 0.1 \sim \phi 6$



树脂加工用平底铣刀“Clear Cut”



End Mill for Resin

共有135种规格

Total 135 sizes

树脂加工用平底铣刀。全刃长造型的L/D为最大10倍
长颈造型为最大35倍

Square end mill for resin. Maximum L/D=10 for standard type
Maximum L/D=35 for long neck type

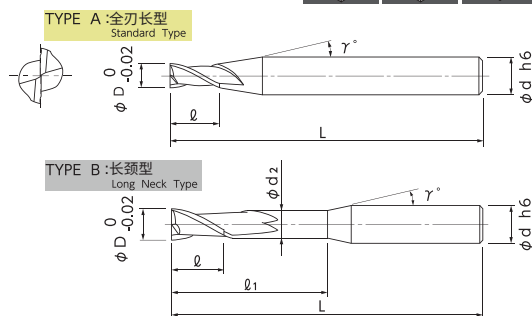

- 可根据加工形状选择3倍刃长、5倍刃长、10倍刃长、超长颈及同径型！
- 也可用于铝、铜等非铁金属材料。
- Available for the suitable L/D (3D, 5D and 10D) Length of cut with Extra Long Neck or without Under Neck Length!
- Applicable to nonferrous material such as Aluminium and Copper.

★ 返修对应（柄长须在15mm以上。详情请咨询本公司。）

单位 [规格: mm / 价格: 日元]
Unit [Size : mm / Retail Price : JPY]

产品代码 Code No.	(D)外径 Dia.	(L)刃长 Length of Cut	(L1)颈长 Under Neck Length	形状 Type	(d2)颈径 Neck Dia.	(γ)颈角 Neck Taper Angle	(d)柄径 Shank Dia.	(L)全长 Overall Length	定价(日元) Retail Price
01-00644-00100	0.1	0.3	—	A	—	9°	4	45	7,400
01-00644-00108			0.8	B	0.085	12°	4	45	8,800
01-00644-00110			1		0.085	12°	4	45	11,600
01-00644-00150	0.15	0.45	—	A	—	9°	4	45	6,700
01-00644-00151			1	B	0.13	12°	4	45	8,400
01-00644-00152			1.5		0.13	12°	4	45	10,500
01-00644-00200	0.2	0.6	—	A	—	9°	4	45	6,400
01-00644-00201		1	—		—	9°	4	45	7,400
01-00644-00203		0.6	1	B	0.18	12°	4	45	7,800
01-00644-00204			1.5		0.18	12°	4	45	9,500
01-00644-00202			2		0.18	12°	4	45	12,600
01-00644-00300		0.9	—	A	—	9°	4	45	5,700
01-00644-00301	0.3	1.5	—		—	9°	4	45	6,300
01-00644-00302		2	—		—	9°	4	45	7,000
01-00644-00304		0.9	1.5	B	0.28	12°	4	45	6,800
01-00644-00305			2		0.28	12°	4	45	7,600
01-00644-00306			2.5		0.28	12°	4	45	9,200
01-00644-00303			3		0.28	12°	4	45	12,100
01-00644-00400	0.4	1.2	—	A	—	9°	4	45	6,200
01-00644-00401		2	—		—	9°	4	45	7,400
01-00644-00402		3	—		—	9°	4	45	8,400
01-00644-00403		1.2	2	B	0.37	12°	4	45	6,500

订购方法
How to Order

请指定RSE230 外径(D)×刃长(L)〔×颈长(L1)〕。
(仅形状A(全刃长型)的 $\phi 3$ 刃长9、15和 $\phi 4$ 刃长12、20需指定柄径(d)。)
When you order, indicate RSE230 (D)×(L) [×(L1)]. Choose Shank Dia. (d) for TypeA of Dia. 3×9 ϕ 、15 ϕ and Dia. 4×12 ϕ 、20 ϕ .
※(γ)为参考值。
※(γ) is reference value.

树脂加工
Resin Milling

★ 返修对应（柄长须在15mm以上。详情请咨询本公司。）

单位 [规格:mm / 价格:日元]
Unit [Size : mm / Retail Price : JPY]

产品代码 Code No.	(D)外径 Dia.	(ℓ)刃长 Length of Cut	(ℓ1)颈长 Under Neck Length	形状 Type	(d2)颈径 Neck Dia.	(γ)颈角 Neck Taper Angle	(d)柄径 Shank Dia.	(L)全长 Overall Length	定价(日元) Retail Price
01-00644-00406	0.4	1.2	2.5	B	0.37	12°	4	45	6,500
01-00644-00407			3		0.37	12°	4	45	6,500
01-00644-00404			4		0.37	12°	4	45	7,100
01-00644-00405			5		0.37	12°	4	45	7,900
01-00644-00500	0.5	1.5	—	A	—	9°	4	45	4,200
01-00644-00501		2.5	—		—	9°	4	45	5,000
01-00644-00502		5	—		—	9°	4	45	6,300
01-00644-00503		1.5	3	B	0.46	12°	4	45	4,400
01-00644-00504			4		0.46	12°	4	45	4,400
01-00644-00506			6		0.46	12°	4	45	4,400
01-00644-00508			8		0.46	12°	4	50	6,800
01-00644-00510			10		0.46	12°	4	50	8,400
01-00644-00512			12		0.46	12°	4	50	8,900
01-00644-00515			15		0.46	12°	4	50	9,500
01-00644-00520			20		0.46	12°	4	50	11,000
01-00644-00600	0.6	1.8	—	A	—	9°	4	45	4,800
01-00644-00601		3	—		—	9°	4	45	5,900
01-00644-00602		4	—		—	9°	4	45	6,300
01-00644-00604		1.8	4	B	0.56	12°	4	45	4,900
01-00644-00606			6		0.56	12°	4	45	5,300
01-00644-00608			8		0.56	12°	4	50	7,600
01-00644-00610			10		0.56	12°	4	50	8,200
01-00644-00612			12		0.56	12°	4	50	8,900
01-00644-00800	0.8	2.4	—	A	—	9°	4	45	4,800
01-00644-00801		4	—		—	9°	4	45	5,900
01-00644-00802		6	—		—	9°	4	45	6,300
01-00644-00806		2.4	6	B	0.76	12°	4	45	4,900
01-00644-00808			8		0.76	12°	4	50	5,100
01-00644-00810			10		0.76	12°	4	50	5,700
01-00644-00812			12		0.76	12°	4	50	6,200
01-00644-00816			16		0.76	12°	4	60	6,700
01-00644-01000	1	3	—	A	—	9°	4	45	3,400
01-00644-01001		5	—		—	9°	4	50	4,200
01-00644-01003		7.5	—		—	9°	4	50	4,800

- N 铝合金
Aluminium Alloy
- N 铜合金
Copper
- O 树脂
Resin

平底

全刃长

Full Cutting Length

长颈

Long Neck

无涂层

Non-Coating

Square

RSE230

树脂加工用平底铣刀“Clear Cut”

End Mill for Resin

★ 返修对应（柄长须在15mm以上。详情请咨询本公司。）

单位 [规格:mm / 价格:日元]
Unit [Size : mm / Retail Price : JPY]

产品代码 Code No.	(D)外径 Dia.	(ℓ)刃长 Length of Cut	(ℓ ₁)颈长 Under Neck Length	形状 Type	(d ₂)颈径 Neck Dia.	(γ)颈角 Neck Taper Angle	(d)柄径 Shank Dia.	(L)全长 Overall Length	定价(日元) Retail Price
01-00644-01002	1	10	—	A	—	9°	4	50	8,000
01-00644-01006		3	6	B	0.95	12°	4	50	3,800
01-00644-01008			8		0.95	12°	4	50	3,800
01-00644-01010			10		0.95	12°	4	50	4,400
01-00644-01012			12		0.95	12°	4	50	4,400
01-00644-01015			15		0.95	12°	4	60	4,400
01-00644-01020			20		0.95	12°	4	60	5,300
01-00644-01025			25		0.95	12°	4	70	6,300
01-00644-01030			30		0.95	12°	4	70	7,900
01-00644-01035			35		0.95	12°	4	80	10,500
01-00644-01500	1.5	4.5	—	A	—	9°	4	45	3,700
01-00644-01501		7.5	—		—	9°	4	50	4,400
01-00644-01502		15	—		—	9°	4	60	8,200
01-00644-01510		4.5	10	B	1.45	12°	4	50	4,000
01-00644-01512			12		1.45	12°	4	50	4,000
01-00644-01515			15		1.45	12°	4	60	4,500
01-00644-01518			18		1.45	12°	4	60	4,500
01-00644-01523			23		1.45	12°	4	70	6,100
01-00644-01530			30		1.45	12°	4	70	7,400
01-00644-01538			38		1.45	12°	4	80	8,900
01-00644-01545			45		1.45	12°	4	90	10,500
01-00644-01553			53		1.45	12°	4	90	11,600
01-00644-02000	2	6	—	A	—	9°	4	50	3,700
01-00644-02001		10	—		—	9°	4	50	4,400
01-00644-02003		15	—		—	9°	4	60	6,900
01-00644-02002		20	—		—	9°	4	60	8,200
01-00644-02012		6	12	B	1.94	12°	4	60	4,000
01-00644-02015			15		1.94	12°	4	60	4,000
01-00644-02020			20		1.94	12°	4	60	4,400
01-00644-02024			24		1.94	12°	4	70	5,300
01-00644-02030			30		1.94	12°	4	80	5,400
01-00644-02040			40		1.94	12°	4	90	8,300
01-00644-02050			50		1.94	12°	4	110	10,300
01-00644-02060			60		1.94	12°	4	110	11,600
01-00644-02070			70		1.94	12°	4	110	12,600

订购方法 How to Order

请指定RSE230 外径(D)×刃长(ℓ) [×颈长(ℓ₁)]。
(仅形状A(全刃长型)的φ3刃长9、15和φ4刃长12、20需指定柄径(d))。
When you order, indicate RSE230 (D)×(ℓ) [×(ℓ₁)]. Choose Shank Dia. (d) for TypeA of Dia. 3×9ℓ・15ℓ and Dia. 4×12ℓ・20ℓ.
※(γ)为参考值。
※(γ) is reference value.

铝合金

Aluminium Alloy

N

铜合金

Copper

N

树脂

Resin

O

树脂加工
Resin Milling

树脂加工用平底铣刀 “Clear Cut”
End Mill for Resin

★ 返修对应（柄长须在15mm以上。详情请咨询本公司。）

单位 [规格:mm / 价格:日元]
Unit [Size : mm / Retail Price : JPY]

产品代码 Code No.	(D)外径 Dia.	(ℓ)刃长 Length of Cut	(ℓ1)颈长 Under Neck Length	形状 Type	(d2)颈径 Neck Dia.	(γ)颈角 Neck Taper Angle	(d)柄径 Shank Dia.	(L)全长 Overall Length	定价(日元) Retail Price
★ 01-00644-03000	3	9	—	A	—	—	3	100	6,800
★ 01-00644-03001			—		—	9°	6	50	5,000
★ 01-00644-03003		15	—		—	—	3	100	7,400
★ 01-00644-03002			—		—	9°	6	60	5,500
★ 01-00644-03004		20	—		—	9°	6	60	6,600
★ 01-00644-03005		25	—		—	9°	6	70	6,900
★ 01-00644-03006		30	—		—	9°	6	70	7,200
★ 01-00644-03015		9	15	B	2.85	12°	6	60	5,500
★ 01-00644-03020			20		2.85	12°	6	60	6,100
★ 01-00644-03024			24		2.85	12°	6	70	6,600
★ 01-00644-03030			30		2.85	12°	6	70	6,600
★ 01-00644-03036			36		2.85	12°	6	80	7,200
★ 01-00644-03045			45		2.85	12°	6	90	7,700
★ 01-00644-03060			60		2.85	12°	6	110	12,100
★ 01-00644-03075			75		2.85	12°	6	120	14,900
★ 01-00644-04000	4	12	—	A	—	—	4	120	8,200
★ 01-00644-04001			—		—	9°	6	50	5,000
★ 01-00644-04003		20	—		—	—	4	120	10,500
★ 01-00644-04002			—		—	9°	6	60	6,400
★ 01-00644-04004		30	—		—	9°	6	70	6,900
★ 01-00644-04005			—		—	9°	6	90	7,500
★ 01-00644-04020		12	20	B	3.8	12°	6	60	5,900
★ 01-00644-04030			30		3.8	12°	6	70	6,600
★ 01-00644-04040			40		3.8	12°	6	90	6,900
★ 01-00644-04055			55		3.8	12°	6	110	12,100
★ 01-00644-04070			70		3.8	12°	6	120	14,900
★ 01-00644-05002	5	10	—	A	—	9°	6	60	5,300
★ 01-00644-05000		15	—		—	9°	6	70	5,700
★ 01-00644-05001		25	—		—	9°	6	80	7,700
★ 01-00644-05003		35	—		—	9°	6	90	8,100
★ 01-00644-05004		40	—		—	9°	6	100	9,400
★ 01-00644-05030		15	30	B	4.8	12°	6	90	7,200
★ 01-00644-05040			40		4.8	12°	6	100	7,500
★ 01-00644-05055			55		4.8	12°	6	120	11,000
★ 01-00644-05070			70		4.8	12°	6	130	15,400
★ 01-00644-06002	6	12	—	A	—	—	6	70	5,500
★ 01-00644-06000		18	—		—	—	6	80	6,100
★ 01-00644-06003		25	—		—	—	6	80	7,200
★ 01-00644-06001		30	—		—	—	6	90	7,700
★ 01-00644-06004		40	—		—	—	6	100	8,600
★ 01-00644-06005		50	—		—	—	6	120	9,900
★ 01-00644-06040		18	40	B	5.8	—	6	100	8,000
★ 01-00644-06060			60		5.8	—	6	120	10,600
★ 01-00644-06080			80		5.8	—	6	130	16,000

- N 铝合金
Aluminium Alloy
- N 铜合金
Copper
- O 树脂
Resin

树脂加工
Resin Milling